


Go with the curve!

Curve – Arches for Drywall

The easiest way to create beautiful doorway arches




- Installs and finishes like drywall
- No extra framing
- No need to bend drywall
- Available for 30" & 36" openings
- No waste, no scrap

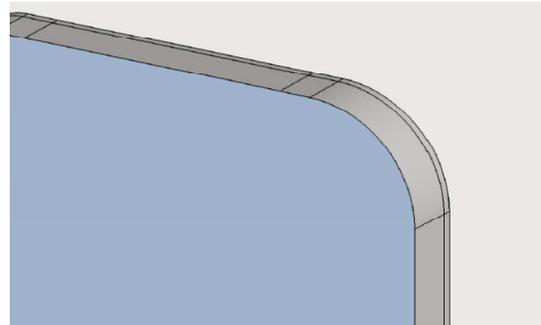

Rounded corners



Parabolic arches

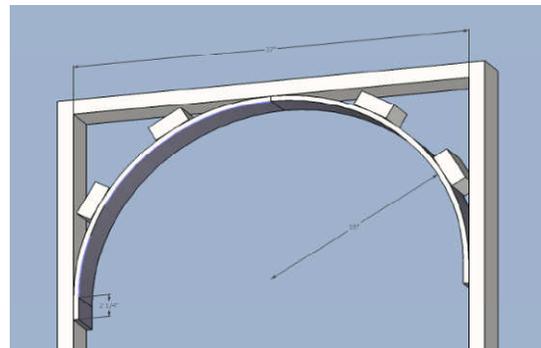

Full Round Arches

Fulcrum Composites, Inc.
1407 E. Grove St.
Midland, MI 48640

Ph: 989-636-1025
Fax: 989-837-1566
www.fulcrumcomposites.com/curve.html
info@fulcrumcomposites.com

Go with the curve!



Fasten corners in place with drywall screws



Add flat drywall strips around jamb



Install face-sheet, roto-zip opening. Screw into blocking



Trim with preferred edging



Mud & finish as normal

Fulcrum Composites, Inc.
1407 E. Grove St.
Midland, MI 48640

Ph: 989-636-1025
Fax: 989-837-1566
www.fulcrumcomposites.com/curve.html
info@fulcrumcomposites.com

Go with the curve!

Installation and Usage Tips

- Corners have 2 1/4" flats from the curve to make the transition to drywall easier.
- Use depth-set drywall screws. Installation torque will be lower than standard drywall
- Install corners first
- Add flat strips of drywall inside the jamb
- Install face drywall sheet
- Cut out opening with Roto-zip or similar
- Add screws into the blocking already attached to the corner
- Apply preferred finishing to edges. Can use any conventional trim
- Tape, mud, finish and paint like drywall
- If it is necessary to cut:
Preferably use a table saw with a fence and a sharp blade
Can also cut with a sharp utility knife. Cut through BOTH skins
- Avoid peeling skins away from core
- Avoid denting edges
- *Drywall products and techniques vary significantly. We strongly recommend that you experiment with your intended finishing system to ensure satisfactory results before implementing on a project.*

This product is not fire rated and should not be used as part of a fire barrier
Not be used as a load bearing structure
Always consult local building codes

Fulcrum Composites, Inc.
1407 E. Grove St.
Midland, MI 48640

Ph: 989-636-1025
Fax: 989-837-1566
www.fulcrumcomposites.com/curve.html
info@fulcrumcomposites.com

Go with the curve!

Arches and Rounded Doorways	
Inside Radius	Arches are 3 1/2 " wide to fit standard stud wall – other widths on request
4	Rounded Corner (any size opening)
8	Rounded Corner (any size opening)
15	Round Arch for 30" opening (31" framed)
18	Round Arch for 36" opening (37" framed)
15 wide 7½ high	Elliptical Arch for 30" opening (31" framed)
18 wide /9 high	Elliptical Arch for 36" opening (37" framed)



**If you don't see the dimensions or shape you require – Call us
We'd love to create it for you!**

Fulcrum Composites, Inc.
1407 E. Grove St.
Midland, MI 48640

Ph: 989-636-1025
Fax: 989-837-1566
www.fulcrumcomposites.com/curve.html
info@fulcrumcomposites.com